



SUNTUF® BH

Corrugated High Impact Polycarbonate Sheetting



- New, Stronger, Better
- 100% diffused light and reduced glare
- Three Times Thicker
- **2.8mm thickness for Better Hail Resistance**



ACCESSORIES

Capping & Flashings



Infills



Self Drilling Screws



Clearfix
65mm

Purlin
Tape



Back Channel
Infill Tape



Use Clearfix 65mm Self Drilling Screws save up to 50% on installation time.

Handling and Storage

- Store sheets on a flat surface in a well-protected and shaded area out of direct sunlight.
- Sheets stacked / stored in the sun will be affected by heat build-up and possible distortion. Any damage caused by this will void the warranty.
- Take care to avoid moisture build up between stored sheets which can cause possible whitening of the sheets.
- Ensure sheets are free from any chemical, paint solvent and sealant contact (including silicone type products) these type of products are incompatible with polycarbonate sheeting.
- Sheets may be cleaned with warm soapy water and a soft sponge. Hose down thoroughly – ensure all possible safety precautions are taken.

Product Warranty

Full warranty terms and conditions available from:
www.palram.com.au

Safety

Never walk directly on Suntuf®, or any other polycarbonate/PVC sheets. Use a board placed across at least 3 purlins to spread the load.

Product Availability

Colors	Clear - LT-90% HT-88% S Grey - LT-12% HT-40%		
Thickness	2.8 mm		
Width	860 mm	Cover	760 mm
Profile	Drawing		

76/18 Corrugated




INSTALLATION GUIDELINES

Step 1


Purlins & Accessories

Maximum Purlin
Spacing

Profile
Corrugated
End Span
1100mm
Mid Span
1400mm

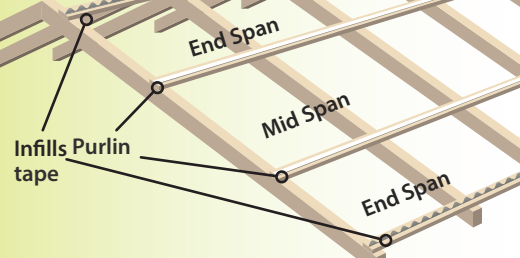

insure that your roof pitch
is at least 5°.




Step 2

Fixings

Profile	End row	Mid row
Corrugated	every 2 nd	every 3 rd

Overlap: Corrugated - 1 1/2 corrugation


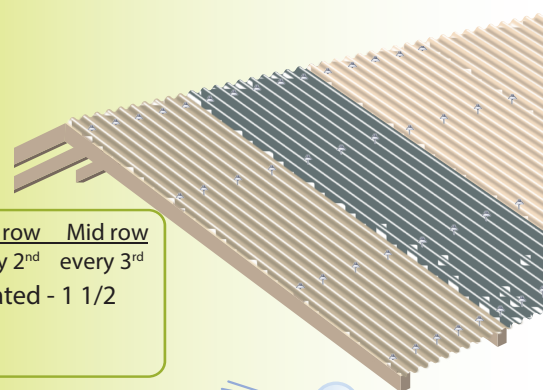


Prevailing wind direction

Step 3

Capping & flashings for various installations

APEX ROOF - Fit barge capping to top of ridge where sheet meet and screw fix into top purlin.

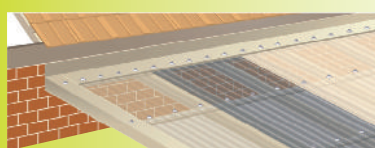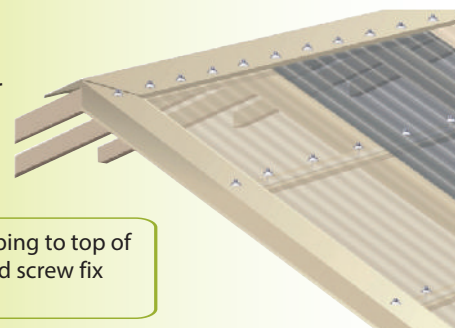

AGAINST A WALL/FASCIA - Fit barge capping to edge of sheet and apron flashing at the wall or fascia. Secure using recommended fixing screws.



UNDER A GUTTER - Fit Back channel to fascia, slide sheet into channel and screw/fix, push foam infill to underside of sheeting.



PALRAM H/O VIC/TAS

34 Buys Court
Derrimut VIC 3030
Tel: (03) 9219 4444
Fax: (03) 9219 4455
salesvic@palram.com

PALRAM NSW/ACT

Unit 2 / 26 Redfern Street
Wetherill Park NSW 2164
Tel: (02) 8788 6100
Fax: (02) 8788 6199
salesnsw@palram.com

PALRAM QLD

Unit 9C / 380 Bilsen Road
Geebung QLD 4034
Tel: (07) 3172 5581
Fax: (07) 3172 5516
salesqld@palram.com

PALRAM SA/NT

517A Cross Keys Road
Cavan SA 5094
Tel: (08) 8262 2288
Fax: (08) 8262 3388
salessa@palram.com

PALRAM WA

74 Christable Way
Landsdale WA 6065
Tel: (08) 9302 4173
Fax: (08) 9302 5287
saleswa@palram.com



10.2017

In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.

©1996-2011 PALRAM Industries Ltd. | Company and product names are trademarks of PALRAM Industries Ltd.

www.palram.com.au

